


Apollo LED Light Fixture

Product Code: APO-W

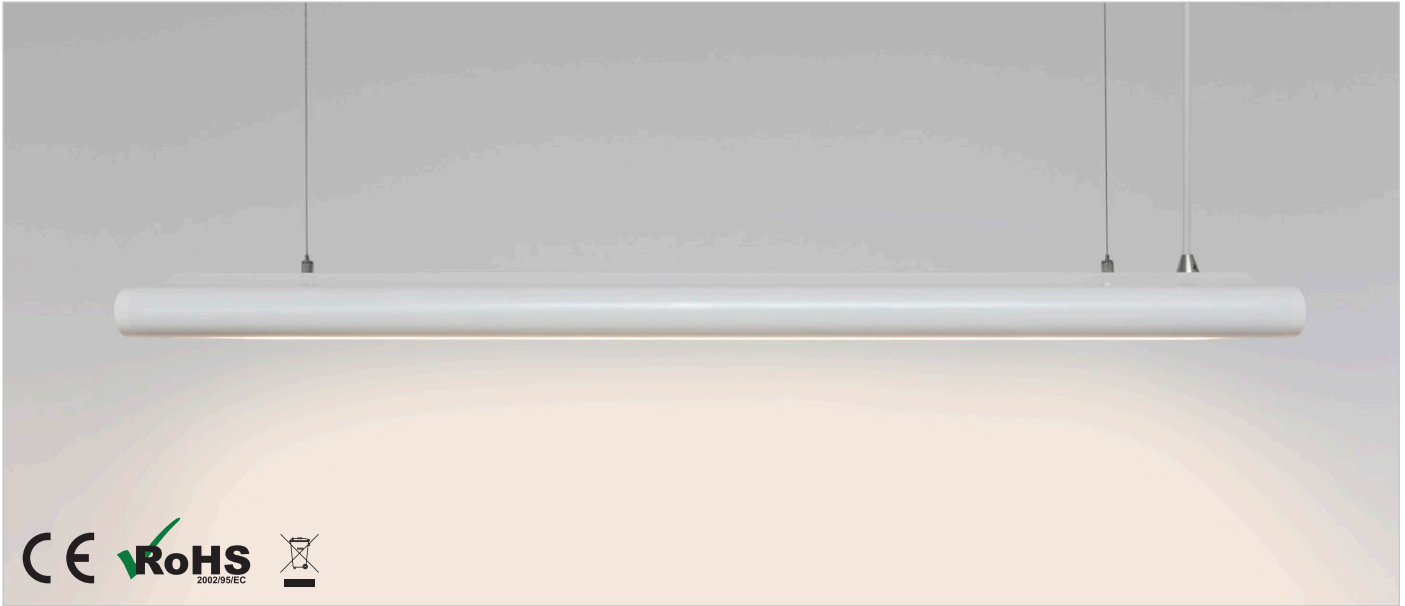

Key Features

- Modern architectural design
- Interconnectable design (up to 10 Apollos)
- Range of metallic finish colours.
- Instant on/off - no flicker or buzz.
- No mercury allowing for non-hazardous waste disposal.
- Energy saving and environment friendly.

Product Description

The Apollo LED light fixture is a modern, architectural pendant or surface mounted light fixture. This luxurious light weight aluminium housing LED lamp is available in a range of vibrant powder coated metallic colours.

The Apollo LED light fixture offers energy cost savings as well as luxurious design, using a fraction of the energy of traditional fluorescent style fittings.

The Apollo fittings are inter-connectable, looping power from the first fitting on the system to the next (link up to 10 fittings). Making it simple to customise lighting length for the project in hand.

Applications include, commercial lighting, architectural lighting, restaurant lighting, hotel lighting, bars and clubs, modern luxury kitchen lighting, residential properties.

Specification

Lighting Performance

Product Code	Length	Colour Temperature	Lumen Output	LED Qty	CRI	Minimum Lifetime
APO-6	600mm	WW: 2800-3200k NW: 4000-4500k PW: 5665-6350k	1800lm	92	>72	30,000hrs
APO-9	900mm		2700lm	144	>72	30,000hrs
APO-12	1200mm		3600lm	192	>72	30,000hrs
APO-15	1500mm		4500lm	240	>72	30,000hrs

N.B Lumen values quoted on Pure White (5665-6350k)

Operating Details

Product Code	Length	Power	Storage Temperature	Working Temperature
APO-6	600mm	20W	-40 to +80 °C	-20 to +40 °C
APO-9	900mm	30W	-40 to +80 °C	-20 to +40 °C
APO-12	1200mm	40W	-40 to +80 °C	-20 to +40 °C
APO-15	1500mm	50W	-40 to +80 °C	-20 to +40 °C

Options

Single LED Colours	Optics
Warm White, Neutral White, Pure White	120°

Input Data

Input Voltage	Power Supply Type	Power Factor	Input Connection
100-240V AC	Constant Current	>0.9	Flying Leads

Physical Details

Product Code	Length	Weight	Finish	Mounting	Ingress Protection
APO-6	600mm	1.7kg (±10g)	White, Silver, Black Red, Blue - MOQ of 10	Pendant or ceiling mounting	IP20
APO-9	900mm	2.4Kg (±10g)		Pendant or ceiling mounting	IP20
APO-12	1200mm	3.6Kg (±10g)		Pendant or ceiling mounting	IP20
APO-15	1500mm	4.6Kg (±10g)		Pendant or ceiling mounting	IP20

Colour



Optics

