

REWARDING BRIGHTNESS



With integrated GA-016
+ PSU adapter.

Available colors




Trackspots

Linea AS 3F

Specifications

| | |
|----------------------------|--|
| Colour(s) | Matt white RAL9016 (XX=MW) / Matt black RAL 9005 (XX=BL) / Matt grey RAL 9006 (XX=GR) |
| Beam angle (FWHM) | 18° / 37° / 60° |
| UGR (4H8H 70/50/20) | <19 (18° + 37°) |
| Fixture material | Die cast aluminium |
| Environment | Indoor |
| IK rate | IK03 |
| Operating temperature (Ta) | -20°C / +45°C |
| Safety marks | EN60598 / EN62031 / EN 62471 |
| EMC compliance | EN55015 |
| Colour consistency (SDCM) | MacAdam step 3 |
| Warranty | 7 Years |



This luminaire contains built-in LED lamps

The lamps cannot be changed in the luminaire.

874/2012



IP20

REWARDING BRIGHTNESS

Item specifications (part A)

| Description | 18° | 37° | 60° | Type | mA |
|------------------------------|--------------|--------------|--------------|--------|-----|
| | Item code | Item code | Item code | | |
| Linea AS 3000 Lm 3000K CRI80 | 170403XXDA02 | 170403XXDB02 | 170403XXDC02 | No dim | 800 |
| Linea AS 2500 Lm 3000K CRI96 | 170403XXDG02 | 170403XXDH02 | 170403XXDJ02 | No dim | 800 |
| Linea AS 3400 Lm 4000K CRI80 | 170403XXDD02 | 170403XXDE02 | 170403XXDF02 | No dim | 800 |

Item specifications (part B)

| Description | W | Lm | Lm/W | CRI (typ.) | Pf | Ripple | Inrush current | B-16A Fuse | Safety class | Energy class |
|------------------------------|------|------|------|------------|------|--------|----------------|------------|--------------|--------------|
| Linea AS 3000 Lm 3000K CRI80 | 31,7 | 3000 | 95 | 82 | 0.95 | 20 | 5A 50µS | 50 | I | A+ |
| Linea AS 2500 Lm 3000K CRI96 | 31,7 | 2500 | 79 | 96 | 0.95 | 20 | 5A 50µS | 50 | I | A+ |
| Linea AS 3400 Lm 4000K CRI80 | 31,7 | 3400 | 107 | 82 | 0.95 | 20 | 5A 50µS | 50 | I | A+ |

Item specifications (part C)


| Description | Weight | Dimensions single carton | Quantity per carton | Expected lifespan (25°C) | | |
|------------------------------|---------|--------------------------|---------------------|--------------------------|------------|------------|
| | | | | L70B50 | L80B50 | L90B50 |
| Linea AS 3000 Lm 3000K CRI80 | 1355 gr | 275x210x130 mm | 8 pcs | 131.000 hrs | 80.000 hrs | 35.000 hrs |
| Linea AS 2500 Lm 3000K CRI96 | 1355 gr | 275x210x130 mm | 8 pcs | 131.000 hrs | 80.000 hrs | 35.000 hrs |
| Linea AS 3400 Lm 4000K CRI80 | 1355 gr | 275x210x130 mm | 8 pcs | 131.000 hrs | 80.000 hrs | 35.000 hrs |

Choose your lumen output (MLM)

| | mA | W | Lumen Output | | | Lumen / Watt | | | UGR | | | | | | | | |
|------------------------|-----|------|--------------|-------------|-------------|--------------|-------------|-------------|-------------|------|------|-------------|------|------|-------------|------|------|
| | | | CRI80 3000K | CRI96 3000K | CRI80 4000K | CRI80 3000K | CRI96 3000K | CRI80 4000K | CRI80 3000K | | | CRI96 3000K | | | CRI80 4000K | | |
| | | | 18° | 37° | 60° | 18° | 37° | 60° | 18° | 37° | 60° | 18° | 37° | 60° | 18° | 37° | 60° |
| <i>Special request</i> | 350 | 13,0 | 1500 | 1100 | 1650 | 115 | 85 | 127 | 12.5 | 13.6 | 18.0 | 11.4 | 12.5 | 16.9 | 12.9 | 13.9 | 18.3 |
| <i>Special request</i> | 500 | 17,6 | 2000 | 1450 | 2200 | 114 | 82 | 125 | 13.5 | 14.6 | 19.0 | 12.4 | 13.5 | 17.9 | 13.9 | 14.9 | 19.3 |
| <i>Special request</i> | 700 | 26,5 | 2700 | 2150 | 3150 | 102 | 81 | 119 | 14.6 | 15.6 | 20.0 | 13.8 | 14.8 | 19.2 | 15.1 | 16.2 | 20.6 |
| Standard | 800 | 31,7 | 3000 | 2500 | 3400 | 95 | 79 | 107 | 14.9 | 16.0 | 20.4 | 14.3 | 15.3 | 19.8 | 15.4 | 16.4 | 20.8 |

All values are measured at 230V (+/- 7%)

Dimensions

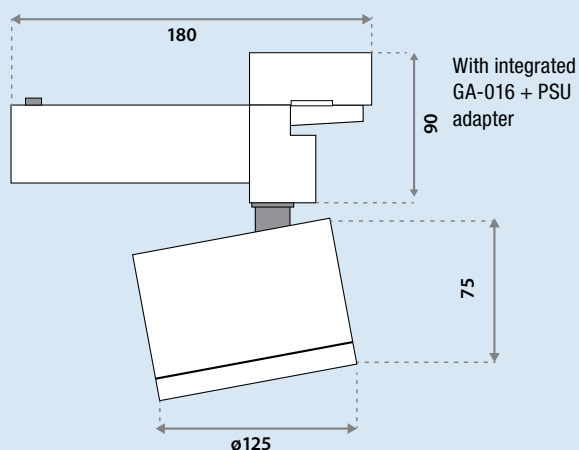

Extra LED options

LEDs from the LUXEON Stylist Series
Specially developed for shops specialised in fashion or fresh food, and for restaurants.
Ask our sales department about the possibilities.



Tracks



On request! Ask our sales department about the possibilities.